



1 PRODUCT OVERVIEW

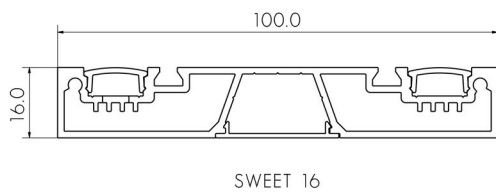

2 FIX WALL BRACKETS IN TO A SOLID FIXING

M = MAX. DISTANCE BETWEEN WALL BRACKETS IS 800MM
MAX. DISTANCE FROM END OR JOIN IN EXTRUSION IS 200MM

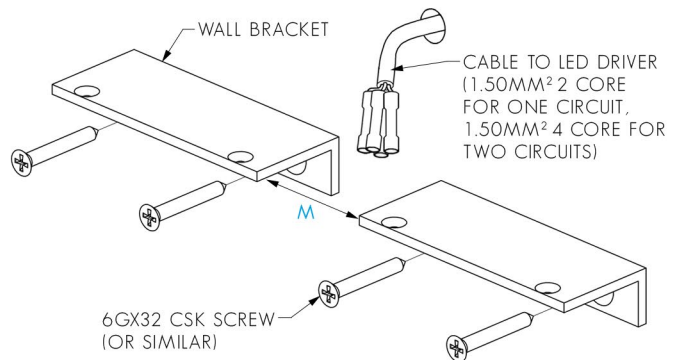

3 JOIN EXTRUSIONS, INSTALL LED STRIP, DIFFUSER AND END CAPS

1. IF USING MULTIPLE LENGTHS OF EXTRUSION, SLIDE EXTRUSIONS TOGETHER ON TO STRAIGHT JOINERS OR 90 DEGREE BENDS, THEN TIGHTEN GRUB SCREWS.

2. IMPORTANT: BEFORE MOUNTING LED STRIP, CLEAN EXTRUSION USING AN ALCOHOL BASED CLEANER.

3. REMOVE BACKING FROM LED STRIPS TO EXPOSE STICKY SURFACE. LAY LED STRIP INTO EXTRUSION, USING THE SMALL GROOVES IN THE BACK OF THE EXTRUSION AS A GUIDE.

4. CLIP DIFFUSERS INTO EXTRUSION, ENSURING A FIRM CONNECTION (SEE FIG. 1).

5. SLIDE WALL BRACKET LUGS INTO EXTRUSION.

5. PUSH END CAPS INTO ENDS OF EXTRUSION.


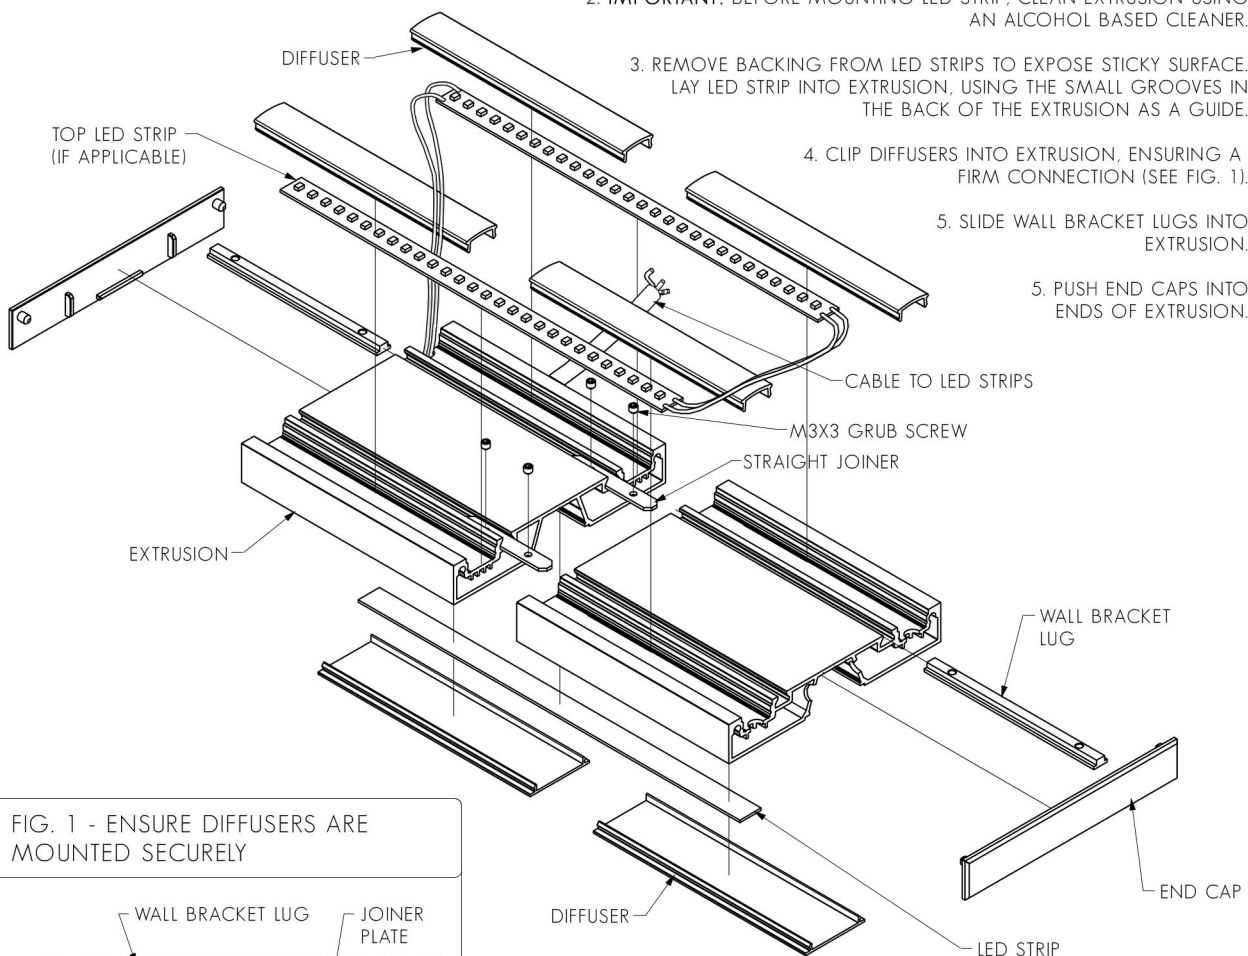


FIG. 1 - ENSURE DIFFUSERS ARE MOUNTED SECURELY

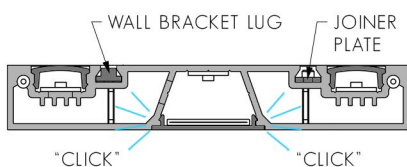

NOTE: WHEN LINKING TOP LED STRIPS AS PER DIAGRAM, BE SURE TO CHECK LED MANUFACTURER'S MAX. RUN LENGTH TO AVOID VOLTAGE DROP. IT MAY BE NECESSARY TO FEED EACH STRIP INDEPENDENTLY USING A 6 CORE CABLE.

4

MAKE ELECTRICAL CONNECTION, FIX EXTRUSION TO WALL BRACKETS

1. MAKE ELECTRICAL CONNECTION: CONNECT LED STRIP TAILS TO LED DRIVER CABLE, THEN SEAL WITH HEAT SHRINK (OR SEE FIG. 2 IF SUPPLIED WITH MALE/FEMALE CONNECTORS).

2. LIFT EXTRUSION ASSEMBLY AND TIGHTEN LUGS AND WALL BRACKETS TOGETHER WITH THE M3X6 CSK SCREWS, ENSURING A FIRM CONNECTION (SEE FIG. 3).

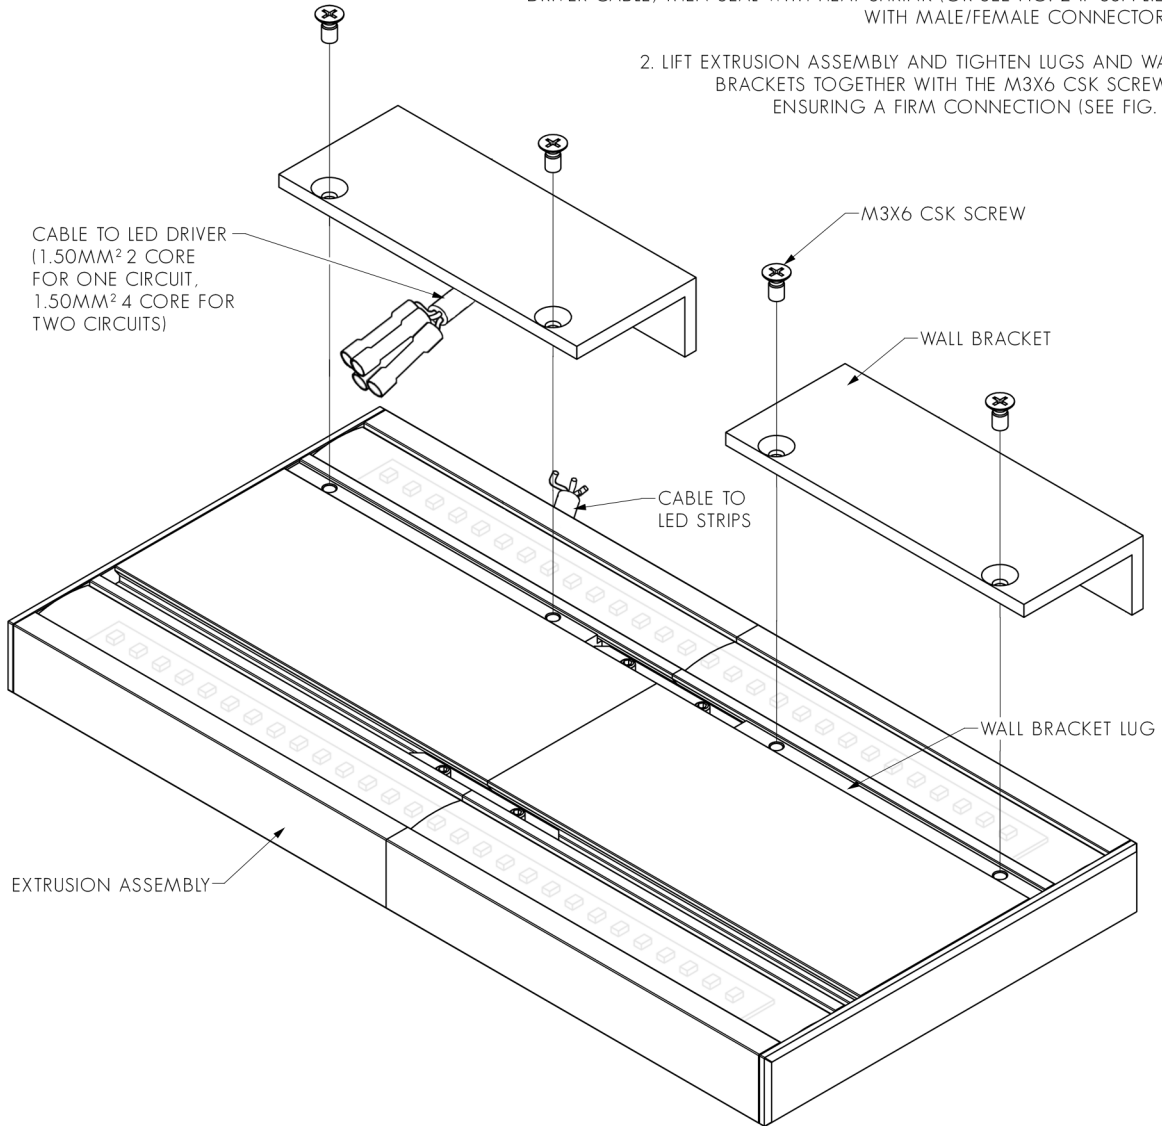


FIG. 3 - ENSURE EXTRUSION IS MOUNTED SECURELY

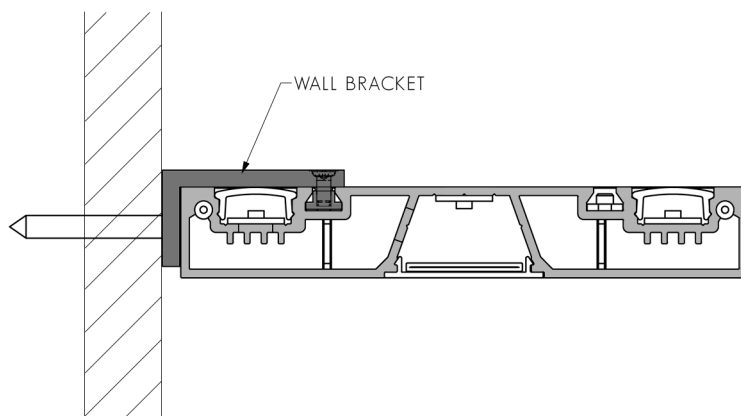


FIG. 2 - MAKE ELECTRICAL CONNECTION

