




OLEVEON PLUS

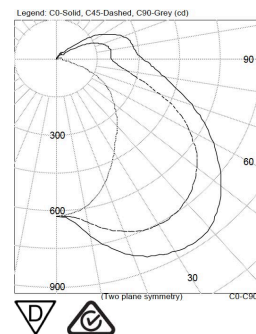

Single

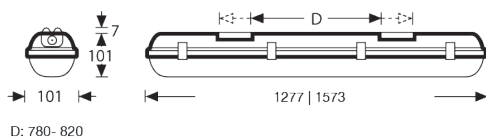

Twin

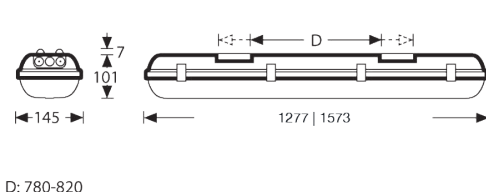

| | |
|----------------------|-----------|
| Colour | Grey |
| Degree of protection | IP66 |
| Safety class | I |
| Hot wire test | 650°C |
| Impact resistance | 6J / IK08 |

Luminaire Type

LED ceiling and wall luminaire for standard damp room application.

Mounting Types

Ceiling fixing either directly or with included rapid-mounting clip. Suspended mounting via included stainless steel bracket.

Applications

For damp rooms and canopied outdoor areas.

Optical System

With opal polycarbonate diffuser, impact-resistant. Smooth outer, with inner longitudinal prisms and finely structured front ends, manufactured from one piece.

Luminaire Body

Luminaire body of glass-fibre reinforced polyester, low flammability. With front cable entry, grommets supplied. Colour of luminaire body light grey, similar to RAL 7035.

Available control system

Non-dim - ET

DALI - ETD

Proximity Sensor on/off - ETS

Proximity Sensor dim to 10% - ETS10

Sensor + Repeater - ETS MASTER

OLEVEON PLUS



LED System

| Type | Title | Output | Power | Efficacy | L90 B10 | CRI | Ambient Temp |
|--------|-------------------|--------|-------|----------|---------|-------|--------------|
| Single | Oleveon Plus 1200 | 4930lm | 35.2W | 140lm/W | 60,000h | Ra>80 | up to +35°C |
| Single | Oleveon Plus 1200 | 4580lm | 32.7W | 140lm/W | 60,000h | Ra>80 | up to +35°C |
| Single | Oleveon Plus 1200 | 4230lm | 30.2W | 140lm/W | 60,000h | Ra>80 | up to +35°C |
| Single | Oleveon Plus 1200 | 3875lm | 27.7W | 140lm/W | 60,000h | Ra>80 | up to +35°C |
| Single | Oleveon Plus 1200 | 3520lm | 25.1W | 140lm/W | 60,000h | Ra>80 | up to +35°C |
| Single | Oleveon Plus 1200 | 3170lm | 22.6W | 140lm/W | 60,000h | Ra>80 | up to +35°C |
| Single | Oleveon Plus 1200 | 2835lm | 20.3W | 140lm/W | 60,000h | Ra>80 | up to +35°C |
| Single | Oleveon Plus 1200 | 2480lm | 17.7W | 140lm/W | 60,000h | Ra>80 | up to +35°C |

| Type | Title | Output | Power | Efficacy | L90 B10 | CRI | Ambient Temp |
|------|-------------------|--------|-------|----------|---------|-------|--------------|
| Twin | Oleveon Plus 1200 | 9370lm | 67.9W | 138lm/W | 60,000h | Ra>80 | up to +35°C |
| Twin | Oleveon Plus 1200 | 8700lm | 63.0W | 138lm/W | 60,000h | Ra>80 | up to +35°C |
| Twin | Oleveon Plus 1200 | 8030lm | 58.2W | 138lm/W | 60,000h | Ra>80 | up to +35°C |
| Twin | Oleveon Plus 1200 | 7360lm | 53.3W | 138lm/W | 60,000h | Ra>80 | up to +35°C |
| Twin | Oleveon Plus 1200 | 6690lm | 48.5W | 138lm/W | 60,000h | Ra>80 | up to +35°C |
| Twin | Oleveon Plus 1200 | 6025lm | 43.7W | 138lm/W | 60,000h | Ra>80 | up to +35°C |
| Twin | Oleveon Plus 1200 | 5360lm | 38.8W | 138lm/W | 60,000h | Ra>80 | up to +35°C |
| Twin | Oleveon Plus 1200 | 4690lm | 34.0W | 138lm/W | 60,000h | Ra>80 | up to +35°C |