



APPLICATION


- Offices
- Retail
- Residential

FEATURES

- Uniform light
- Two sizes in a surface mounted or suspended application
- Perfect for open spaces, conference rooms or living areas
- Made locally and factory assembled

TECHNICAL DATA

LED WATTS	30 W - 75 W
COLOUR TEMP	3000 K, 4000 K, Tuneable white
LUMENS	2200 lm 6570 lm
IP RATING	IP20
BEAM DISTRIBUTION	Wide - Lambertian
LED SOURCE	LED 24V DC
CRI	> 90
MOUNTING	Surface mounted Suspended
MATERIALS	Aluminium body PMMA diffuser
OPERATING TEMP	-25°C ~ 40°C
SERVICE LIFE	L80 = 50.000 hrs
DIMMING	DALI
DIMENSIONS	ø 380 mm ø 600 mm
WARRANTY	5 Years

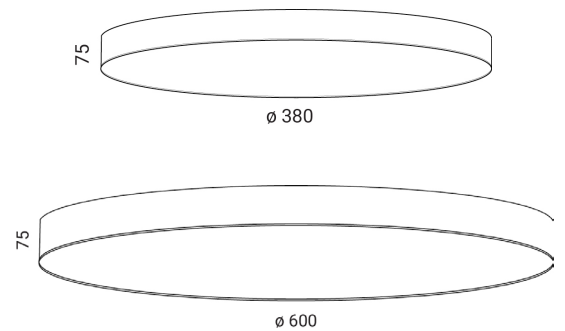


FINISH



White

Black

* Custom colours available

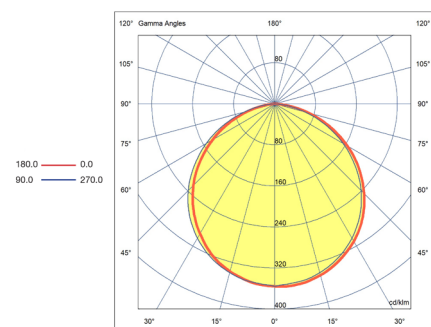

LUMINAIRE SELECTION

KRYPTON - - - -

WIDTH	LUMENS	CCT	DRIVER
380			ET - Switchable
600	Refer to Kryton Lumen Table	Refer to Kryton Lumen Table	ETD - DALI
			BTTW - Bluetooth tuneable
			DTW - Dali tuneable white

An example:

KRYPTON - 600 - 3600 - 927-966 - BTTW

LED SYSTEM

Title	Output	Power	Efficacy	CCT	R9
Krypton 380	2200lm	30.1W	73.1lm/W	3000K	99
Krypton 380	2540lm	30.2W	84.1lm/W	4000K	86
Krypton 600	5960lm	75.5W	78.9lm/W	3000K	93
Krypton 600	6570lm	75.7W	86.8lm/W	4000K	86

Title	Output	Power	Efficacy	CCT	R9	MR
Krypton 380 / Tuneable	2030lm	32.2W	63lm/W	2700K	90	48
	2340lm	31W	76lm/W	6500K	72	106
Krypton 600 / Tuneable	3600lm	52W	70lm/W	2700K	95	48
	4300lm	51.5W	83lm/W	6500K	77	106