

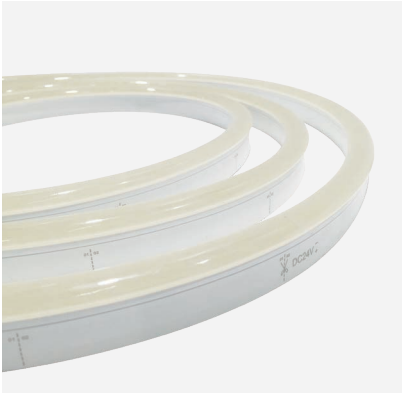



# NEON CLASSIC | TUNEABLE WHITE



COLOUR	CODE
2500 - 5000 K	BL-LS-4900

ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%  
SOLD BY THE METRE  
IES FILES AVAILABLE



## TECHNICAL DATA

LED WATTS	12 W/m	CRI	≥ 80	CUTTING LENGTH	83.3 mm
INPUT VOLTS	24 V DC constant voltage	WARRANTY	5 years	HOUSING	UV and flame resistant white PVC
OPERATING TEMP	- 20 °C ~ + 45 °C	MIN BEND RADIUS	60 mm	CONTROL	Requires 2-channel controller
COLOUR	WW 2460 K ±120K CW 5000 K ±285K	BEND DIRECTION	Horizontal bending	MAX. RUN PER FEED	10 m using one feed 20 m using two feeds
LUMENS	WW ≥ 130 lm/m CW ≥ 130 lm/m	DIMENSIONS	16.5 mm x 29 mm (11.5 mm at the base)	MOUNTING	See Installation Guide for mounting accessories
BEAM ANGLE	180°	INGRESS PROTECTION	IP40, IP67 or IP68 Protection established by use of connection type See Installation Guide for connections		
SOURCE LIFE	50,000 hrs				

## APPLICATION

- Ideal for applications where colour temperature adjustment is required
- Signage and cove lighting
- Architectural features
- Exterior or interior installations
- Swimming or feature pools

## FEATURES

- A perfect replacement for the traditional glass neon tube
- UV and flame resistant
- Suitable for use around salt or chlorinated water