

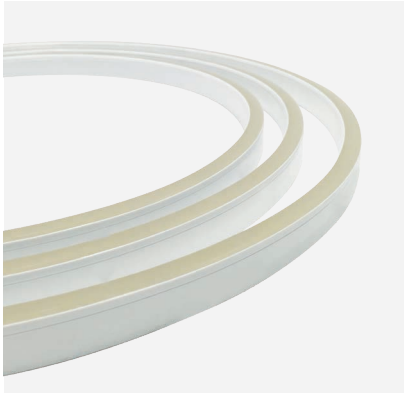
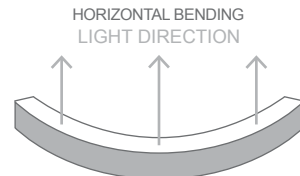


NEON EDGE | WHITE

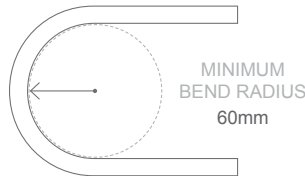

COLOUR	CODE
WARM WHITE 2700 K +/- 145 K	BL-LS-4030-27
WARM WHITE 3000 K +/- 175 K	BL-LS-4030-30
NATURAL WHITE 4000 K +/- 275 K	BL-LS-4030-40
COOL WHITE 5700 K +/- 300 K	BL-LS-4030-57

ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD BY THE METRE
IES FILES AVAILABLE



TECHNICAL DATA

LED WATTS	12 W/m	WARRANTY	5 years	CUTTING LENGTH	83.33 mm
INPUT VOLTS	24 V DC constant voltage	BEAM ANGLE	160°	HOUSING	UV and flame resistant white PVC
OPERATING TEMP	- 20 °C ~ + 45 °C	MIN BEND RADIUS	60 mm	CONTROL	Dimmable by PWM
CRI	≥ 80	DIMENSIONS	11.5 mm x 21 mm	MAX. RUN PER FEED	10 m using one feed 20 m using two feeds
LUMENS	2700 K ≥ 280 lm/m 3000 K ≥ 280 lm/m 4000 K ≥ 320 lm/m 5700 K ≥ 320 lm/m	BEND DIRECTION	Horizontal bending	MOUNTING	See Installation Guide for mounting accessories
SOURCE LIFE	50,000 hrs	INGRESS PROTECTION	IP40, IP67 or IP68 Protection established by use of connection type See Installation Guide for connections		

APPLICATION

- Cove lighting, handrails or toekicks
- Architectural features
- Exterior or interior installations
- Swimming or feature pools

FEATURES

- UV and flame resistant
- Suitable for use around salt or chlorinated water