





NEON EDGE | TUNEABLE WHITE

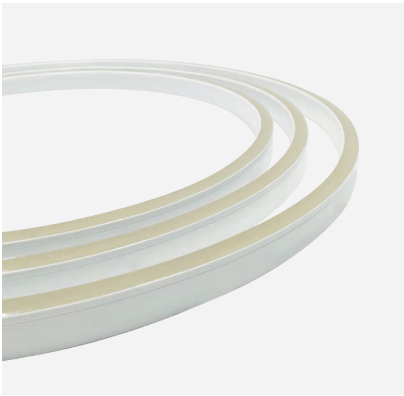

COLOUR	CODE
--------	------

2500 - 5000 K TUNEABLE	BL-LS-4400
---------------------------	------------

ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD BY THE METRE
IES FILES AVAILABLE



TECHNICAL DATA

LED WATTS	12 W/m
INPUT VOLTS	24 V DC constant voltage
OPERATING TEMP	- 20 °C ~ + 45 °C
LUMENS	WW ≥ 110 lm/m CW ≥ 110 lm/m
COLOUR	WW 2460 K +/- 120 K CW 5000 K +/- 285 K
SOURCE LIFE	50,000 hrs

CRI	≥ 80
BEAM ANGLE	160°
WARRANTY	5 years
MIN BEND RADIUS	60 mm
DIMENSIONS	11.5 mm x 21 mm
INGRESS PROTECTION	IP40, IP67 or IP68 Protection established by use of connection type See Installation Guide for connections

BEND DIRECTION	Horizontal bending
CUTTING LENGTH	83.3 mm
HOUSING	UV and flame resistant white PVC
CONTROL	Requires 2-channel controller
MAX. RUN PER FEED	10 m using one feed 20 m using two feeds
MOUNTING	See Installation Guide for mounting accessories

APPLICATION

- Ideal for applications where colour temperature adjustment is required
- Cove lighting, handrails, or toekicks
- Signage and cove lighting
- Architectural features
- Exterior or interior installations
- Swimming or feature pools

FEATURES

- UV and flame resistant
- Suitable for use around salt or chlorinated water