

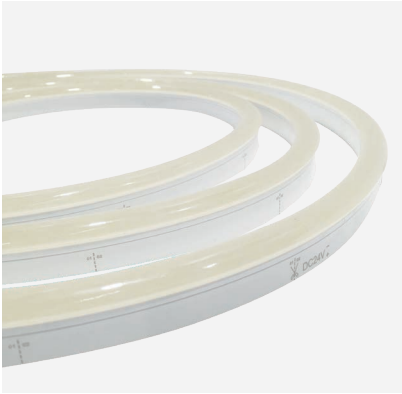
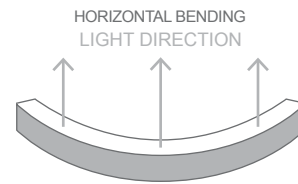


## NEON MICRO CLASSIC | WHITE



COLOUR	CODE
WARM WHITE 3000 K +/- 175 K	BL-LS-4550-30
NATURAL WHITE 4000 K +/- 275 K	BL-LS-4550-40
COOL WHITE 5700 K +/- 300 K	BL-LS-4550-57

ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%  
SOLD BY THE METRE  
IES FILES AVAILABLE



### TECHNICAL DATA

LED WATTS	4.5 W/m	SOURCE LIFE	50,000 hrs	CUTTING LENGTH	83.3 mm
INPUT VOLTS	24 V DC constant voltage	WARRANTY	5 years	HOUSING	UV and flame resistant white PVC
OPERATING TEMP	- 20 °C ~ + 45 °C	MIN BEND RADIUS	60 mm	CONTROL	Dimmable by PWM
CRI	≥ 80	BEND DIRECTION	Horizontal bending	MAX. RUN PER FEED	15 m using one feed 30 m using two feeds
LUMENS	≥ 160 lm/m	DIMENSIONS	16.5 mm x 26 mm (11.5 mm at the base)	MOUNTING	See Installation Guide for mounting accessories
BEAM ANGLE	160°	INGRESS PROTECTION	IP67 or IP68 Protection established by use of connection type See Installation Guide for connections		

### APPLICATION

- A perfect replacement for traditional glass neon tube where a smaller profile is required
- Signage and cove lighting
- Architectural features
- Exterior or interior installations
- Swimming or feature pools

### FEATURES

- UV and flame resistant
- Suitable for use around salt or chlorinated water