

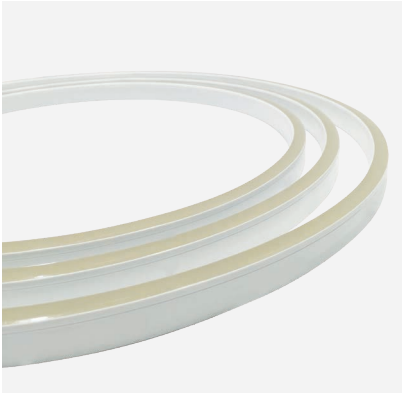
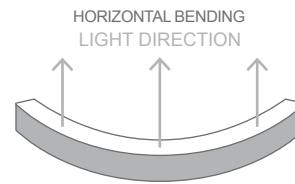


NEON MICRO EDGE | WHITE

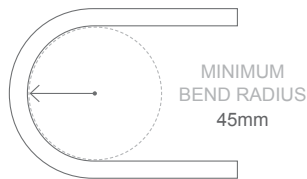

| COLOUR | CODE |
|-----------------------------------|---------------|
| WARM WHITE 3000 K +/- 175 K | BL-LS-4050-30 |
| NATURAL WHITE 4000 K +/- 275 K | BL-LS-4050-40 |
| COOL WHITE 5700 K +/- 300 K | BL-LS-4050-57 |

ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD BY THE METRE
IES FILES AVAILABLE



TECHNICAL DATA

| | | | | | |
|----------------|-----------------------------|-----------------------|--|----------------------|---|
| LED WATTS | 4.5 W/m | SOURCE LIFE | 50,000 hrs | CUTTING LENGTH | 83.3 mm |
| INPUT VOLTS | 24 V DC constant voltage | WARRANTY | 5 years | HOUSING | UV and flame resistant white PVC |
| OPERATING TEMP | - 20 °C ~ + 45 °C | MIN BEND RADIUS | 45 mm | CONTROL | Dimmable by PWM |
| CRI | ≥ 80 | BEND DIRECTION | Horizontal bending | MAX. RUN PER FEED | 15 m using one feed 30 m using two feeds |
| LUMENS | ≥ 120 lm/m | DIMENSIONS | 9 mm x 18 mm | MOUNTING | See Installation Guide for mounting accessories |
| BEAM ANGLE | 160° | INGRESS PROTECTION | IP67 or IP68 Protection established by use of connection type See Installation Guide for connections | | |

APPLICATION

- Ideal where a slimmer profile is required
- Handrails or toekicks
- Architectural features
- Exterior or interior installations
- Swimming or feature pools

FEATURES

- UV and flame resistant
- Suitable for use around salt or chlorinated water