


NEON X | 13W/M | RGB

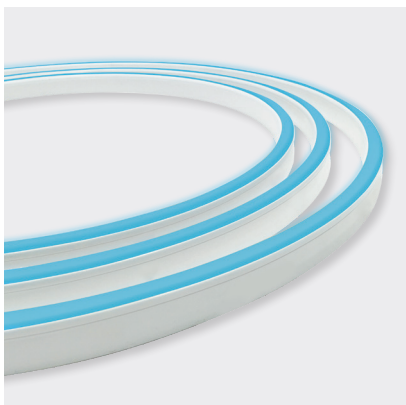

CODE: NEON-X-13W-RGB

COLOUR	LUMENS
RED	45lm/m
GREEN	133lm/m
BLUE	28lm/m
RGB (WHITE)	196lm/m





ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%  
SOLD BY THE METRE  
IES FILES AVAILABLE

APPLICATIONS

- Creative colour installations. Theatres, bars, restaurants, and retail
- Cove lighting, handrails, or toe-kicks
- Architectural features
- Exterior or interior installations
- Swimming or feature pools

FEATURES

- UV & flame resistant
- Suitable for use around salt or chlorinated water



LED WATTS	13W/m
-----------	-------

INPUT VOLTS	24V DC Constant Voltage
-------------	-------------------------

OPERATING TEMP.	-25°C ~ +50°C
-----------------	---------------

MAX. RUN PER POWER FEED	10m using one feed
	20m using two feeds

BEAM ANGLE	120°
------------	------

LED TYPE	Epistar SMD LED 5050
----------	----------------------

LED QTY	72 LED/m
---------	----------

SOURCE LIFE	50,000 hours
-------------	--------------

WARRANTY	5 years
----------	---------

DIMENSIONS	W11.5 × H21mm
------------	---------------

BEND DIRECTION	Horizontal bending
----------------	--------------------

CUTTING LENGTH	83.3mm
----------------	--------

MINIMUM BEND RADIUS	40mm
---------------------	------

HOUSING	UV & flame resistant white PVC
---------	--------------------------------

INGRESS PROTECTION	IP67 Snap Connector or IP68 Injection Moulding <i>Protection established by use of connection type</i>
--------------------	---

CONTROL	Requires 3-channel controller
---------	-------------------------------

MOUNTING	Profile and clips available
----------	-----------------------------

NEON X | 13W/M | RGB | CONNECTION DIAGRAMS

