



## APPLICATION

- Residential
- Offices
- Hallways

## FEATURES

- Die-cast ADC12 aluminium heat sink for excellent thermal management
- Setback light source with soft white reflector
- High quality Bridgelux LED

## TECHNICAL DATA



LED WATTS	11 W
COLOUR TEMP	3000 K, 4000 K
LUMENS	730 lm
IP RATING	IP44
BEAM ANGLE	40°
CRI	> 80
MOUNTING	Recessed
MATERIALS	Aluminium
OPERATING TEMP	-25°C ~ 40°C
SERVICE LIFE	L70 = 50.000 hrs
DIMMING	Phase dim   DALI dim
DIMENSIONS	ø 94 x 64 mm
CUTOUT	ø 85
WARRANTY	5 Years

### FINISH



White

Note: other colour temperatures are available on request

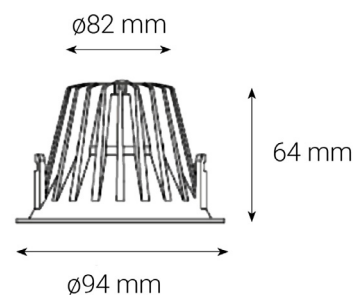


## LUMINAIRE SELECTION



POWER	CCT	BEAM ANGLE	FINISH	DIMMING
11 - 11W	30 - 3000K 40 - 4000K	40	WH	PD - Phase DD - DALI

An example:

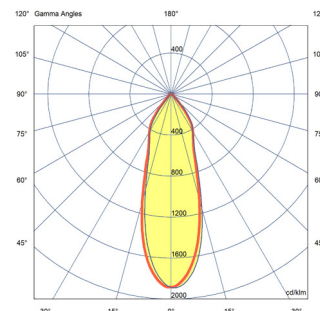

40° beam angle polar curve shown