

# TANTALUM MONO-POINT





## APPLICATION

- Residential
- Commercial
- Hallways
- Retail


## FEATURES

- Sleek minimalism design with concealed reflector
- Aluminium construction with matte powder coat
- With a recessed base for an unobtrusive installation, or surface mounted for a fully contained unit
- Honeycomb, elliptical and glare shield lens accessories
- Interchangeable reflector system
- High quality Bridgelux LED


## TECHNICAL DATA

LED WATTS	15.5 W   25 W
COLOUR TEMP	3000 K   4000 K
LUMENS	1350 lm   2200 lm
IP RATING	IP20
BEAM ANGLE	15°   24°   40°
TILTING ANGLE	Horizontal 350°, Vertical 90°
CRI	> 90
MOUNTING	Recessed   Surface Mounted
MATERIALS	Aluminium
OPERATING TEMP	-20°C ~ 40°C
SERVICE LIFE	L90 B10 = 50,000 hrs
DIMMING	DALI Dim   Non-Dim
DIMENSIONS	Spotlight: Ø 71 mm x 153 mm Base: Ø 75mm
CUTOUT	Ø 63mm
WARRANTY	5 Years
FINISH	 White  Black

Recessed

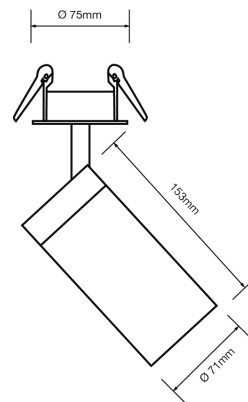

Surface Mounted

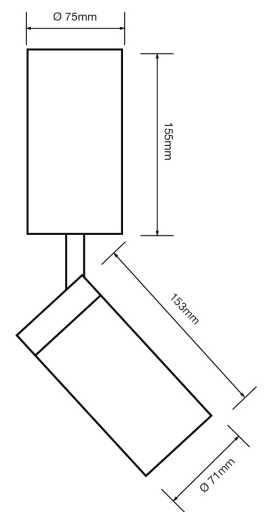


# TANTALUM MONO-POINT



## ACCESSORIES



HC - Honeycomb lens



EL - Elliptical lens



GS - Glare shield


## LUMINAIRE SELECTION

<b>TANTMP</b>							
<b>MOUNTING</b>	<b>POWER</b>	<b>CCT</b>	<b>BEAM ANGLE</b>	<b>FINISH</b>	<b>CONTROL</b>	<b>LENS (OPTIONAL)</b>	
<b>RE</b> Recessed	25 W	<b>30</b> 3000K	40°	<b>WH</b> White	<b>DD</b> DALI	<b>HC</b> Honeycomb	
<b>SM</b> Surface Mount	15 W	<b>40</b> 4000K	24°	<b>BL</b> Black	<b>ND</b> Non-Dim	<b>EL</b> Elliptical	
			15°			<b>GS</b> Glare Shield	


An example:

<b>TANTMP</b>	<b>RE</b>	<b>15</b>	<b>30</b>	<b>25</b>	<b>WH</b>	<b>DD</b>	<b>NA</b>
---------------	-----------	-----------	-----------	-----------	-----------	-----------	-----------


## POLAR CURVES



15° beam angle polar curve shown



24° beam angle polar curve shown



40° beam angle polar curve shown