
ARIMO SLIM MRX DATA SHEET












1200





IP Rating	IP20	
Safety class	I	
Hot wire test	650°C	
Impact resistance	IK02	
Warranty	10 Years	
L80	50,000h	
CRI	Ra>80	
Ambient Temp	up to +35°C	

Luminaire type

Recessed LED luminaire with MRX micro reflector and opal PMMA lateral diffusing optics.

Mounting types

Lay-in luminaire for ceilings with exposed grids. With accessories to be ordered separately for installing in ceilings with concealed grids and cut-out ceiling openings.

Applications

For workstations with computer screens. Offices, Corridors, Foyers, Conference rooms, Retail areas, Waiting zones.

Optical system

With MRX micro louvre for excellent glare control. Direct distribution. Suitable for VDU workstations according to EN 12464-1 via limited luminance $L \le 1500$ cd/m² for beam angle above 65° all-round. Direct glare limitation in accordance with UGR < 19.

Luminaire body

Sheet steel luminaire body, white powder-coated.

Electrical version

With electronic transformer.

Emergency

Self - contained, maintained emergency models are available. Prices on request.
















ARIMO SLIM MRX DATA SHEET



Luminaire Selection

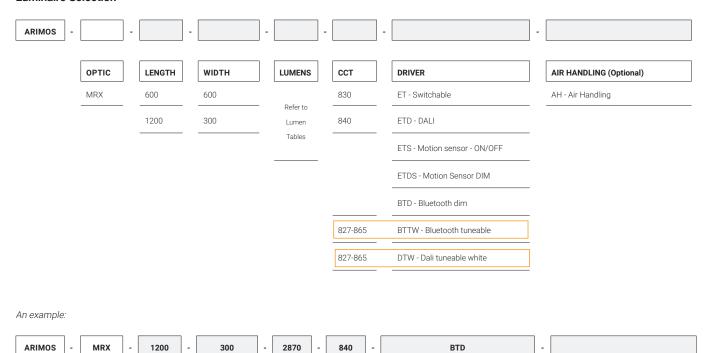

LED System

Title	Output	Power	Efficacy
ArimoS MRX 1200/600	2050lm	17.9W	114.5lm/W
ArimoS MRX 1200/600	2450lm	21.4W	114.5lm/W
ArimoS MRX 1200/600	2870lm	25.2W	113.9lm/W
ArimoS MRX 1200/600	3280lm	28.8W	113.9lm/W

Title	Output	Power	Efficacy
ArimoS MRX 300	1025lm	9W	113.9lm/W
ArimoS MRX 300	1225lm	10.7W	113.9lm/W
ArimoS MRX 300	1435lm	12.6W	114.5lm/W
ArimoS MRX 300	1640lm	14.4W	114.5lm/W