

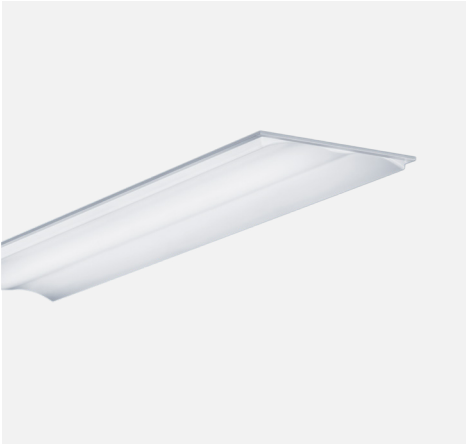


LIVENTY DATA SHEET


300 OT

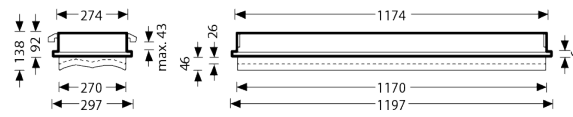


600 OT

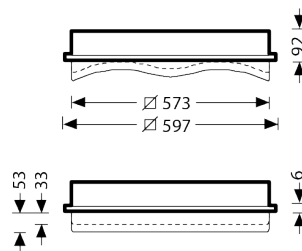



FLAT 300

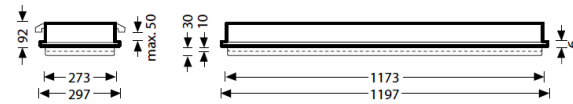

FLAT 600

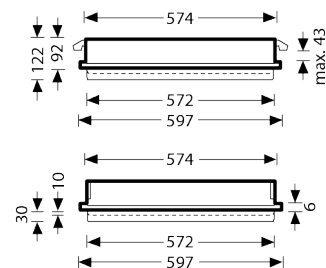

LIVENTY DATA SHEET

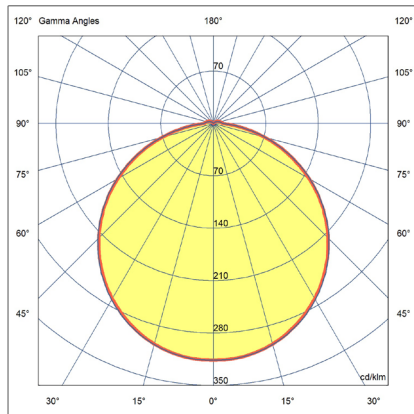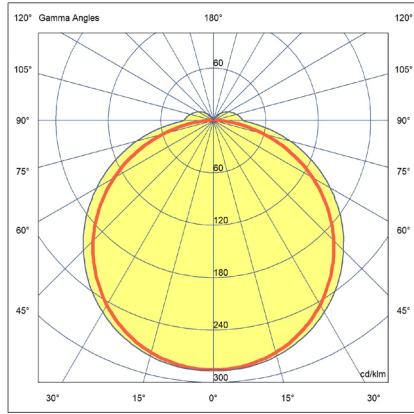

Luminaire Type

Recessed LED luminaire with PMMA diffuser. With 4 LED panels for homogeneous wide-area illumination of the diffuser.

Mounting Types

Standard version for installation into Exposed T-bar ceilings, but special version can be made for plaster ceilings (with ZBB accessory).

Applications

For greater lighting comfort in Offices, Banks, Foyers, Sales rooms, Exhibition rooms.

Optical System

Opal PMMA diffuser with structured surface, projecting on room side for decorative ceiling illumination, for increased lighting comfort. Cover is height-adjustable in 2 positions. Especially high transmission factor and light output ratio. Provides upward light onto ceiling and illumination to walls in compliance with UK LG7, and Australian Green Star Interiors fit-out guide.

Luminaire Body

Sheet steel luminaire body, white powder-coated.

Emergency

Remote, maintained emergency models are available. Prices on request.

Electrical version

With electronic transformer.

IP Rating	IP20
Safety class	I
Hot wire test	650°C
Impact resistance	IK02
Warranty	10 Years
L90 B10	>50,000h
CRI	Ra>80
Ambient Temp	up to +25°C



LIVENTY DATA SHEET

Luminaire Selection

LIVENTY	-		-		-		-		-		-	
LENGTH	WIDTH	DIFFUSER	LUMENS	CCT	DRIVER	AIR HANDLING (Optional)						
600	600	F - Flat	2600	830	ET - Switchable	AH - Air Handling						
1200	300	W - Wave	3000	840	ETD - Dali							
			3160		ETS - Motion Sensor - ON/OFF							
			3450		ETDS - Motion Sensor - DIM							
			4100		BTD - Bluetooth dim							
				927-965 - TW	BTTW - Bluetooth tuneable							
				927-965	DTW - Dali tuneable white							

An example:

LIVENTY	-	1200	-	300	-	F	-	2600	-	840	-	ETD	-	
---------	---	------	---	-----	---	---	---	------	---	-----	---	-----	---	--

LED System

Title	Output	Power	Efficacy
Liventy 300/600	2600lm	23.4W	110lm/W
Liventy 300/600	3000lm	27.3W	110lm/W
Liventy 300/600	3450lm	31.2W	110lm/W
Liventy 300/600	4100lm	37.1W	110lm/W