



## APPLICATION

- Residential
- Commercial
- Hallways
- Retail

## FEATURES


- Sleek minimalism design with concealed reflector
- Aluminium construction with matte powdercoat
- In track slimline driver for DALI dimmable fixtures
- Honeycomb, elliptical and glashield lens accessories
- Interchangeable reflector system
- High quality Bridgelux LED

## TECHNICAL DATA


<b>LED WATTS</b>	15.5 W   25 W
<b>COLOUR TEMP</b>	3000 K   4000 K
<b>LUMENS</b>	1350 lm   2200 lm
<b>IP RATING</b>	IP20
<b>BEAM ANGLE</b>	15°   24°   40°
<b>TILTING ANGLE</b>	Horizontal 350°   Vertical 90°
<b>CRI</b>	> 90
<b>MOUNTING</b>	3 Circuit Track   DALI Track
<b>MATERIALS</b>	Aluminium
<b>OPERATING TEMP</b>	-20°C ~ 40°C
<b>SERVICE LIFE</b>	L90 B10 = 50,000 hrs
<b>DIMMING</b>	DALI dim   Phase Cut
<b>DIMENSIONS</b>	ø 71 mm x 153 mm
<b>WARRANTY</b>	5 Years
<b>FINISH</b>	<div style="display: flex; align-items: center; gap: 10px;"> <div style="text-align: center;">  White         </div> <div style="text-align: center;">  Black         </div> </div>

Note: other colour temperatures are available on request

DALI Track

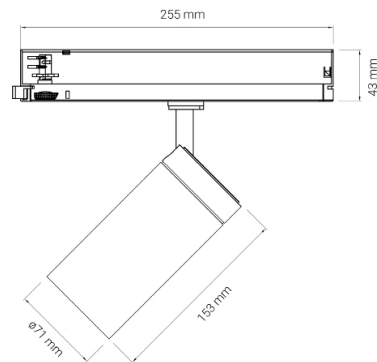


3C Track

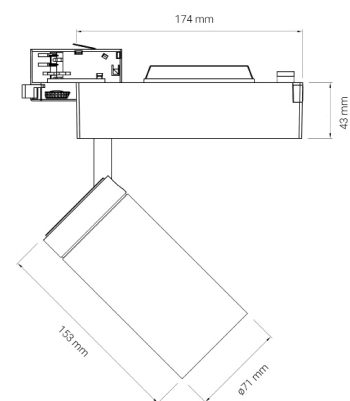

## ACCESSORIES



HC - Honeycomb lens



EL - Elliptical lens



GS - Glareshield


## LUMINAIRE SELECTION

<b>TAN</b>	-		-		-		-		-		-	
<b>POWER</b>		<b>CCT</b>		<b>BEAM ANGLE</b>		<b>FINISH</b>		<b>DIMMING</b>		<b>ACCESSORY (optional)</b>		
15 - 15W		3 - 3000K		40		WH		PD - Phase Cut		HC - Honeycomb		
25 - 25W		4 - 4000K		24		BL		DD - DALI		EL - Elliptical		
				15						GS - Glareshield		


An example:

<b>TAN</b>	-	<b>15</b>	-	<b>4</b>	-	<b>40</b>	-	<b>BL</b>	-	<b>DD</b>	-	<b>GS</b>
------------	---	-----------	---	----------	---	-----------	---	-----------	---	-----------	---	-----------


## POLAR CURVES



15° beam angle polar curve shown

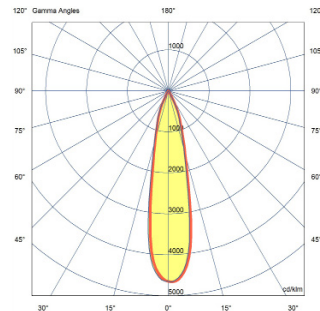

24° beam angle polar curve shown

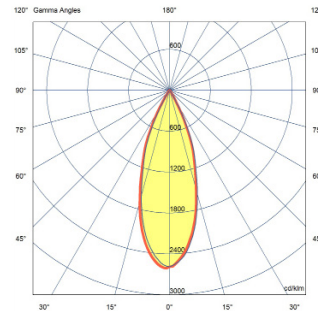

40° beam angle polar curve shown