

# XENON MINI





## APPLICATION


- Galleries
- Museums
- Restaurants
- Retail

## FEATURES

- Adjustable beam angle for ultimate flexibility
- Designed specifically to highlight objects and create subtle drama in spaces
- Miniature size
- Concealed light source for low glare
- Minimalism aluminium body with matte powder coat
- High quality Cree LED

## TECHNICAL DATA

LED WATTS	9 W
COLOUR TEMP	2700 K, 3000 K, 4000 K
LUMENS	530 lm
IP RATING	IP20
BEAM ANGLE	10° - 60° adjustable
TILTING ANGLE	Horizontal 350°   Vertical 90°
CRI	> 90
MOUNTING	3 Circuit Track
MATERIALS	Aluminium
OPERATING TEMP	-20°C ~ 40°C
SERVICE LIFE	L90 B10 = 50.000 hrs
DIMMING	Phase Cut   On Board dimming
DIMENSIONS	ø 52 mm x 100 mm
WARRANTY	5 Years
FINISH	  White Black

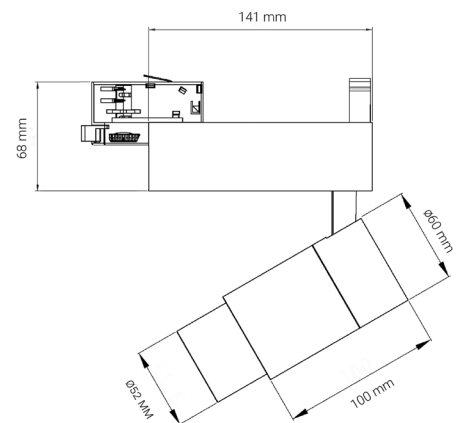

## ACCESSORIES



HC - Honeycomb lens

EL - Elliptical lens


## LUMINAIRE SELECTION

<b>XNM</b>	-	<b>09</b>	-		-	<b>AB</b>	-		-	<b>OB</b>	-	
<b>POWER</b>		<b>CCT</b>		<b>BEAM ANGLE</b>		<b>FINISH</b>		<b>DIMMING</b>		<b>ACCESSORY (optional)</b>		
09 - 9W		27 - 2700K		AB - Adjustable		WH		PD - Phase cut		HC - Honeycomb		
		30 - 3000K				BL		OB - On Board		EL - Elliptical		
		40 - 4000K										


An example:

<b>XNM</b>	-	<b>09</b>	-	<b>40</b>	-	<b>AB</b>	-	<b>BL</b>	-	<b>OB</b>	-	<b>EL</b>
------------	---	-----------	---	-----------	---	-----------	---	-----------	---	-----------	---	-----------

## POLAR CURVES

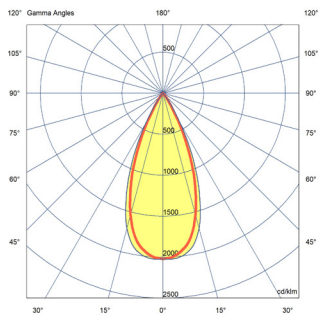

60° beam angle polar curve shown

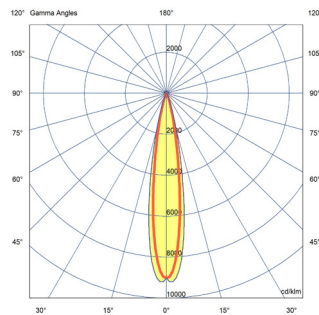

10° beam angle polar curve shown